


# American tapered pipe thread NPT 1:16, ANSI B-1.20.1



800

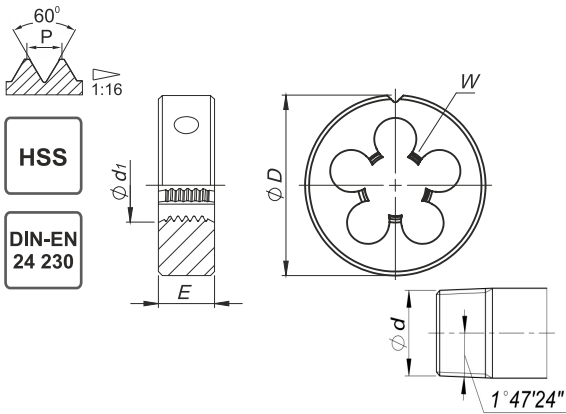

Material groups



Execution

Quality of material

HSS

Chamfer

2P

| NPT | Ød <sub>1</sub> | 1"/P   | P     | ØD x E  | W |  | Norm  | DIN-EN 24 230 |  |  |  |
|-----|-----------------|--------|-------|---------|---|-----------------------------------------------------------------------------------|-------|---------------|--|--|--|
|     |                 |        |       |         |   |                                                                                   | Tol.  |               |  |  |  |
|     |                 |        |       |         |   |                                                                                   | INDEX |               |  |  |  |
| 1/8 | 9,728           | 27     | 0,941 | 30 x 11 | 5 | 9,99                                                                              | 4623  | ●             |  |  |  |
| 1/4 | 13,157          | 18     | 1,411 | 38 x 14 | 5 | 13,26                                                                             | 4627  | ●             |  |  |  |
| 3/8 | 16,662          | 18     | 1,411 | 45 x 18 | 5 | 16,67                                                                             | 4629  | ●             |  |  |  |
| 1/2 | 20,955          | 14     | 1,814 | 45 x 18 | 6 | 20,71                                                                             | 4631  | ●             |  |  |  |
| 3/4 | 26,441          | 14     | 1,814 | 55 x 22 | 6 | 26,03                                                                             | 4635  | ●             |  |  |  |
| 1   | 33,249          | 11.1/2 | 2,209 | 65 x 25 | 7 | 32,59                                                                             | 4639  | ●             |  |  |  |

5



Example of order

N1-121001-4627  
DIN-EN 24 230 1/4" NPT - HSS 800

● Available from stock  
○ On request